


Flooded battery

Code	Voltage	Capacity						Terminal	Lid	Bottom	Layout	Per pallet
		Ah 20h	Ah 10h	Ah 5h	Ah 3h	Ah 1h	Ah 0.5h					
B250C	V							conical	X box Modular	Holds	positive	16x2
	6	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1 standard	Modular	B0	L/R	
		240	220	200	180	140	120					

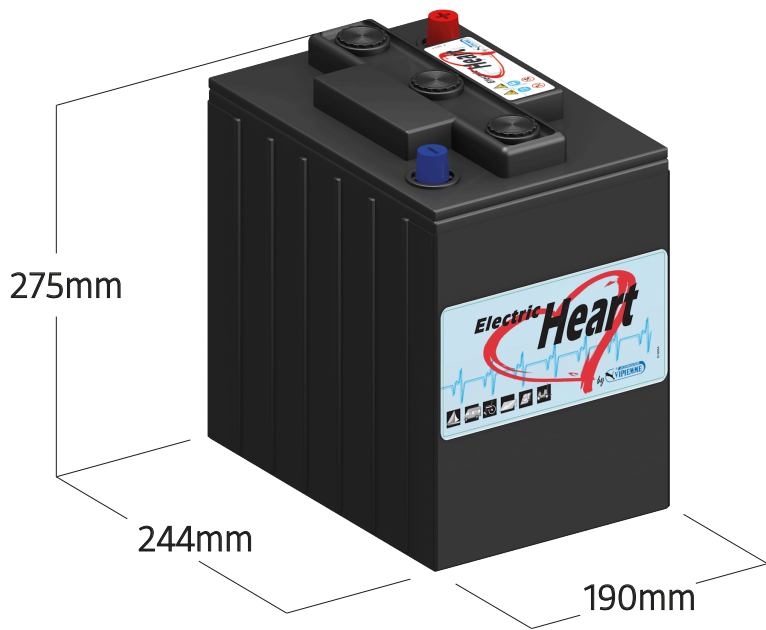


BOX AND LID COLOUR
Black


Technical Characteristics



BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 7.2l



PLATES
Casted grids Pb/Sb alloy.
Rubber separator



WEIGHT
32,0 ±5% Kg