



Flooded battery


Code	Voltage	Capacity						Terminal	Lid	Bottom	Layout	Per pallet
		Ah 20h	Ah 10h	Ah 5h	Ah 3h	Ah 1h	Ah 0.5h					
B258C	V							conical	X box GR28	Holds	positive	12x3
	12	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1 standard	GR28	B1	Right	
		105	96	89	80	62	53					

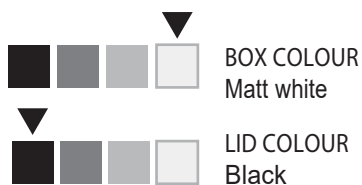


Technical Characteristics

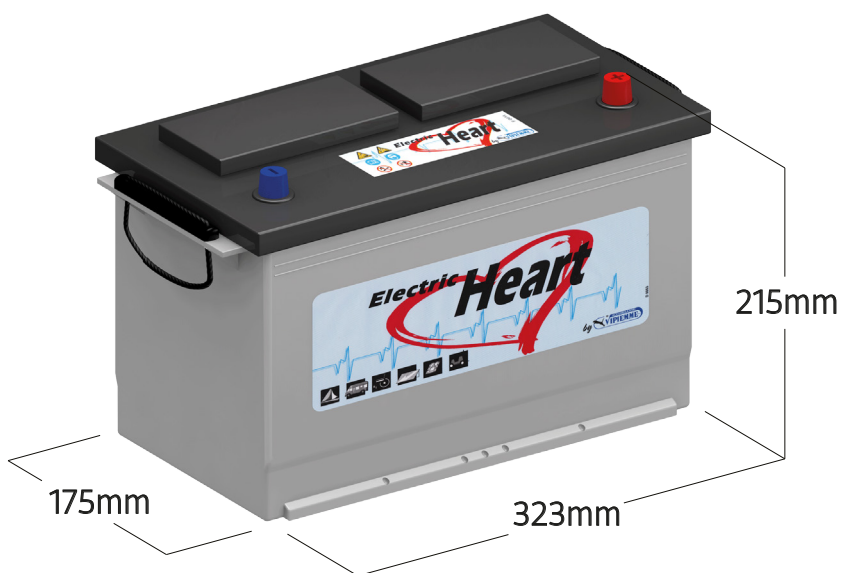

BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFURIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 4.15l



PLATES
Casted grids Pb/Sb alloy.
Rubber separator



WEIGHT
28,0 ±5% Kg