


Flooded battery


Code	Voltage	Capacity						Terminal	Lid	Bottom	Layout	Per pallet
		Ah 20h	Ah 10h	Ah 5h	Ah 3h	Ah 1h	Ah 0.5h					
B266C	V							conical	X box A	Holds	positive	8x3
	12	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1 standard	A flat	B0	Left	
		140	129	119	108	83	70					




Technical Characteristics

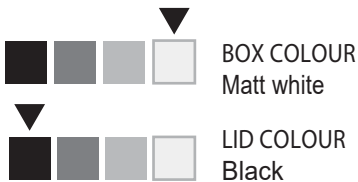

BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 9.1l



PLATES
Casted grids Pb/Sb alloy.
Glass mat



WEIGHT
37,5 ±5% Kg