


Flooded battery


Code	Voltage	Capacity						Terminal	Lid	Bottom	Layout	Per pallet
		Ah 20h	Ah 10h	Ah 5h	Ah 3h	Ah 1h	Ah 0.5h					
B268C	V							conical	X box B	Holds	positive	7x3
	12	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1.75 V/el	1 standard	B flat	B0	Left	
		185	170	157	142	109	93					




Technical Characteristics

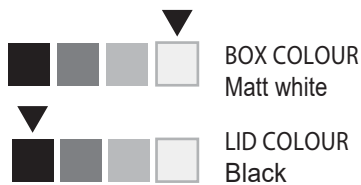

BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 10l



PLATES
Casted grids Pb/Sb alloy.
Glass mat



WEIGHT
46,0 ±5% Kg