


FREE MAINTENANCE BATTERY

Flooded battery									
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Terminal	Lid	Bottom	Layout	Per pallet
B426C	V	Ah 20h	A (EN)	minutes	conical	X box E2	Bottom Holds	positive	25x3
	12	45	360	65 a 25A	1	E2	B1	Right pp	

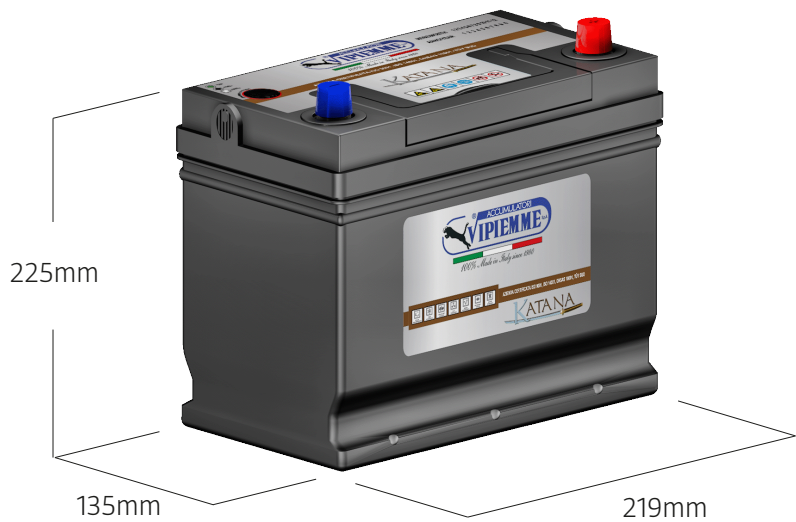

BOX AND LID COLOUR
Black


Technical characteristics



CHARGE INDICATOR
For assessing state of charge



BOX AND LID
PP




SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 3.4 l



FLAME ARRESTOR
Placed in the lid



TEMPERATURE
All values are referred to 25 ° C



PLATES
casted grids in Pb/Sb alloy



WEIGHT
12,5 ±5% Kg