


FREE MAINTENANCE BATTERY

Flooded battery									
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Terminal	Lid	Bottom	Layout	Per pallet
B437C	V	Ah 20h	A (EN)	minutes	conical	X box NS40	Bottom Holds	positive	24x3
	12	40	330	55 a 25A	3/1	NS40	B0	Sx pp	

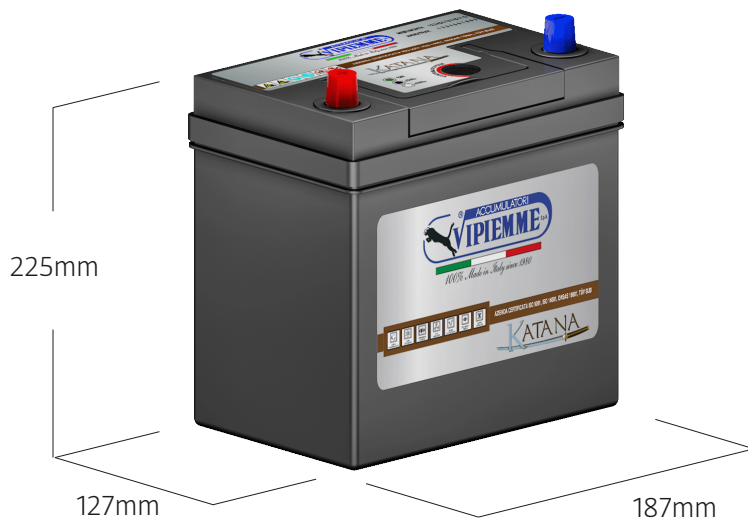

BOX AND LID COLOUR
Black

Technical characteristics




CHARGE INDICATOR
For assessing state of charge




FLAME ARRESTOR
Placed in the lid




BOX AND LID
PP



TEMPERATURE
All values are referred to 25 ° C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 2.7 l



PLATES
casted grids in Pb/Sb alloy



WEIGHT
10,8 ±5% Kg