


# FREE MAINTENANCE BATTERY

Flooded battery									
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Terminal	Lid	Bottom	Layout	Per pallet
B438C T	V	Ah 20h	A (EN)	minutes	conical	X box NS40	Hold	positive	24x3
	12	40	330	55 a 25A	3/1	NS40	B1	Dx pp	

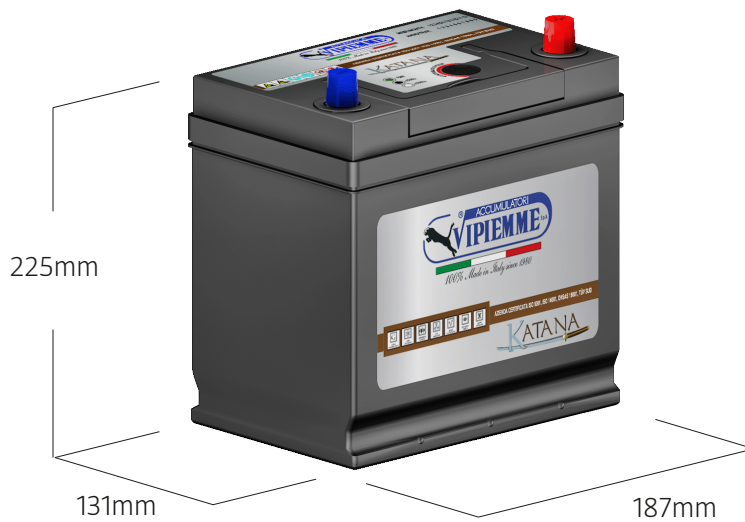

BOX AND LID COLOUR  
Black

## Technical characteristics




**CHARGE INDICATOR**  
For assessing state of charge




**FLAME ARRESTOR**  
Placed in the lid




**BOX AND LID**  
PP



**TEMPERATURE**  
All values are referred to 25 ° C



**SULFORIC ACID**  
Density  
1,28 +/- 0,01 g/ml  
Approximate volume 2.7 l



**PLATES**  
casted grids in Pb/Sb alloy



**WEIGHT**  
10,8 ±5% Kg