


FREE MAINTENANCE BATTERY

Flooded battery									
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Terminal	Lid	Bottom	Layout	Per pallet
B452C	V	Ah 20h	A (EN)	minutes	conical	X box NS60	Bottom Holds	positive	27x3
	12	45	360	65 a 25A	3/1	NS60	B0	Right pp	

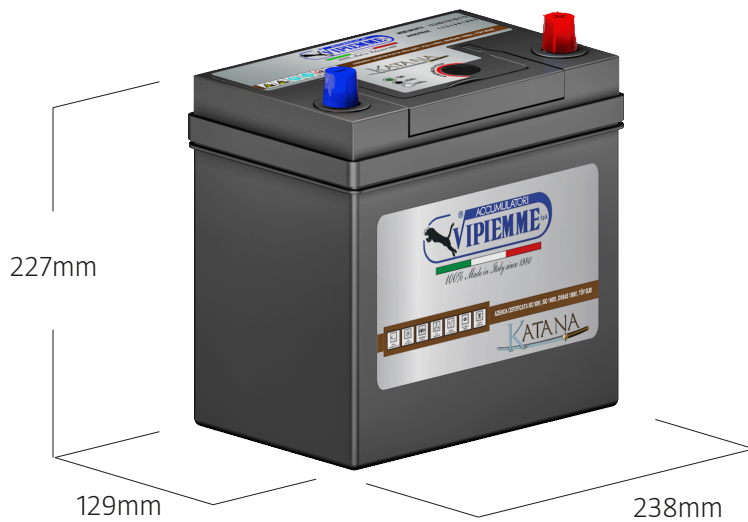

BOX AND LID COLOUR
Black

Technical characteristics




CHARGE INDICATOR
For assessing state of charge




FLAME ARRESTOR
Placed in the lid




BOX AND LID
PP



TEMPERATURE
All values are referred to 25 ° C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 3.8 l



PLATES
casted grids in Pb/Sb alloy



WEIGHT
13,0 ±5% Kg