


## FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B650C	V	Ah 20h	A (EN)	minutes		conical	X box L1B	holds	Pos right	20x4
	12	45	400	65 a 25A	430	1 standard	duplex	B13	Right	

# SAFE ENERGY PLUS

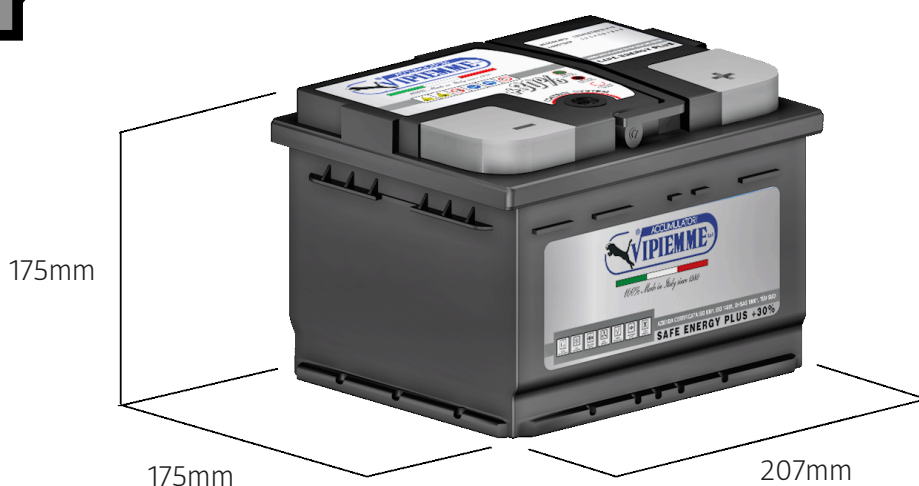

BOX AND LID COLOURS  
Black

### Technical characteristics



**CHARGE INDICATOR**  
For assessing the state of charge



**BOX AND LID**  
PP




**SULFORIC ACID**  
Density  
1,28 +/- 0,01 g/ml  
Approximate volume 2,6l




**BATTERY WEIGHT**  
11,4 Kg ± 5%



**FLAME ARRESTOR**  
Placed in the lid



**TEMPERATURE**  
All values are referred to 25°



**PLATES**  
Expanded grid Pb/Ca alloy.