


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B652C	V	Ah 20h	A (EN)	minutes		conical	X box L2B	holds	Pos right	18x4
	12	60	500	90 a 25A	530	1 standard	duplex	B13	Right	

SAFE ENERGY PLUS

175mm

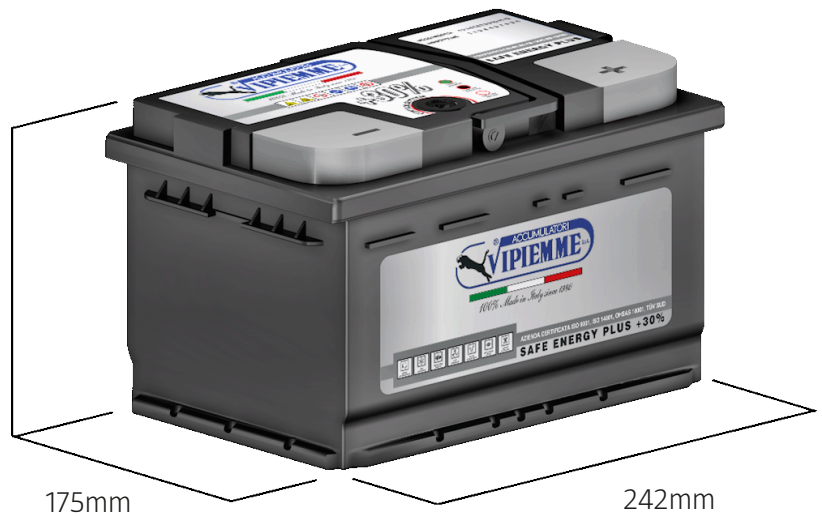

175mm

242mm



BOX AND LID COLOURS
Black

Technical characteristics




CHARGE INDICATOR
For assessing the state of charge




FLAME ARRESTOR
Placed in the lid




BOX AND LID
PP



TEMPERATURE
All values are referred to 25°



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 3.8l



PLATES
Expanded grid Pb/Ca alloy.



BATTERY WEIGHT
14,0 Kg ± 5%