


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B656C	V	Ah 20h	A (EN)	minutes		conical	X box L3B	holds	Pos right	16x4
	12	77	690	130 a 25A	730	1 standard	duplex	B13	Right	

SAFE ENERGY PLUS

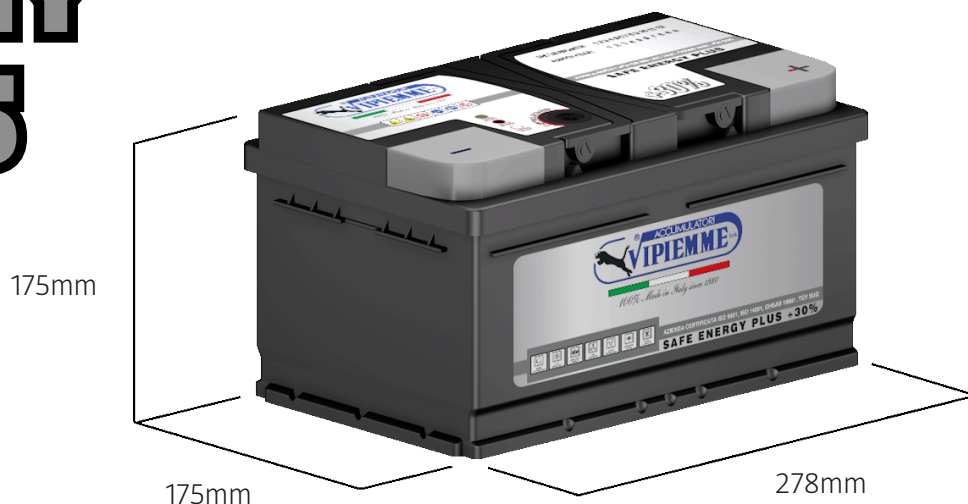

BOX AND LID COLOURS
Black


Technical characteristics



CHARGE INDICATOR
For assessing the state of charge



BOX AND LID
PP




SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 4.0l




BATTERY WEIGHT
17,0 Kg ± 5%



FLAME ARRESTOR
Placed in the lid



TEMPERATURE
All values are referred to 25°



PLATES
Expanded grid Pb/Ca alloy.