


"HEAVY DUTY" AND FREE MAINTENANCE BATTERY

Versione Carica										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B390C	V	Ah 20h	A (EN)	minutes		conical	X box 98COMP	Bottom Holds	positive	12x2
	12	105	750	185 at 25A	750	1 standard	98COMP	B0	Right	

SPIRIT ENERGY TIR

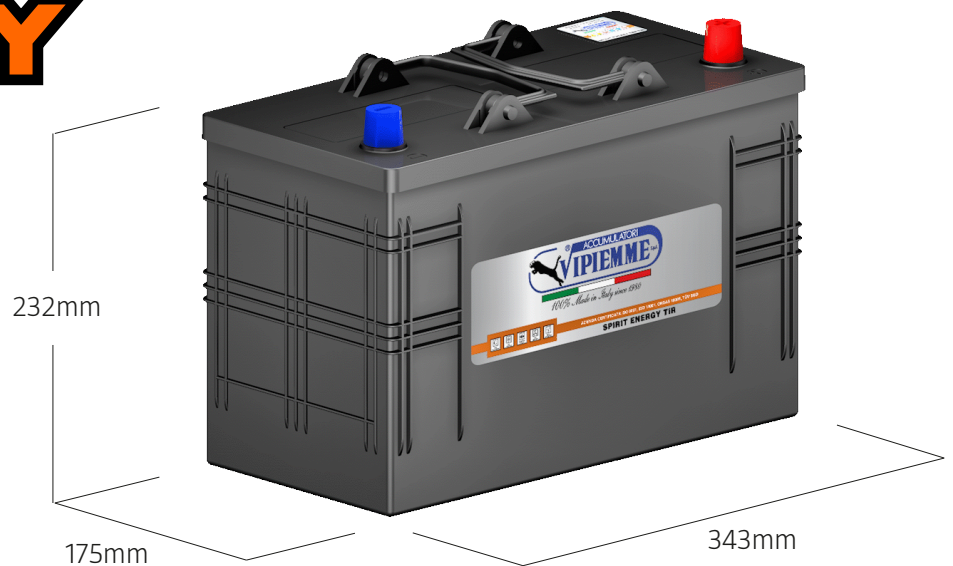


BOX AND LID COLOUR
Black


Technical Characteristics




BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFURIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate acid volume 7.4l



PLATES
expanded grids in Pb/Ca alloy



WEIGHT
26,5 ±5% Kg