


Dry battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B443S	V	Ah 20h	A (EN)	Minutes	Amps	Conical	X box 28NU	Bottom Holds	POS left	36X4
	12	30	300	42 a 25A	300	1 standard	28NU	B0	Left	

TOP ENERGY EVO




Technical characteristics

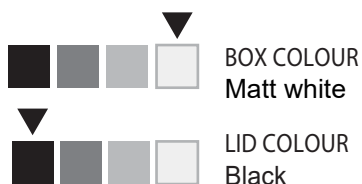


LID AND BOX
PP



FLAME ARRESTOR
Placed in the lid




SULFURIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 1.72 l.



TEMPERATURE
All values are referred to 25°C



BATTERY WEIGHT
6.5 Kg +/-5%



PLATES
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.