


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B108C	V	Ah 20h	A (EN)	minutes		conical	box L1B	holds	Pos right	20x4
	12	45	360	65 a 25A	390	1 standard	L1B	B13	Right	

TOP ENERGY EVO

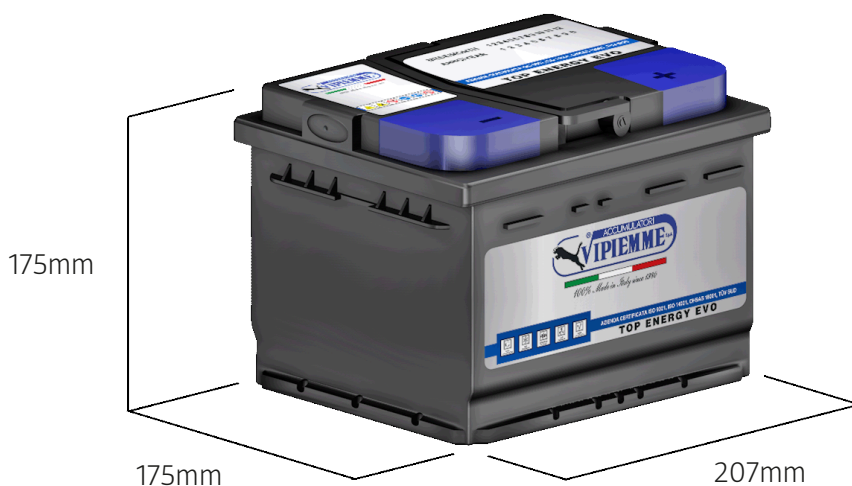


BOX AND LID COLOUR
Black

Technical characteristics



BOX AND LID
PP




SULFURIC ACID
Density
1,28 +/- 0,01g/ml
Approximate volume 2,5l




BATTERY WEIGHT
10,8Kg



FLAMES ARRESTOR
Placed in the lid



TEMPERATURE
All value are referred to 25° C



PLATES
Expanded Pb/Ca alloy.