


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B100C	V	Ah 20h	A (EN)	minutes		conical	box L6	holds	Pos right	12x3
	12	110	950	195 a 25A	880	1 standard	L6	B13	Right	

TOP ENERGY EVO

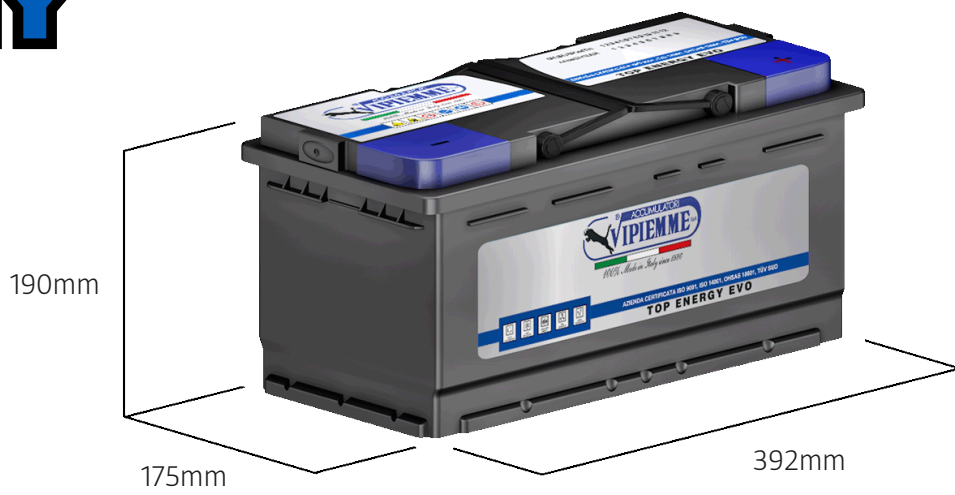


BOX AND LID COLOUR
Black

Technical characteristics




BOX AND LID
PP



SULFURIC ACID
Density
1,28 +/- 0,01g/ml
Approximate volume 6,5l




FLAMES ARRESTOR
Placed in the lid



TEMPERATURE
All value are referred to 25° C



BATTERY WEIGHT
24,7Kg



PLATES
Expanded Pb/Ca alloy.