


**MADE IN ITALY**



FLOODED									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes	Conical				
B102C T2	12	110	850	200 (25A)	1 standard	98 COMP	B1	+ right	12x3=36

## TOP ENERGY TIR


Classification EN50342-1			
W3	C2	V2	E1

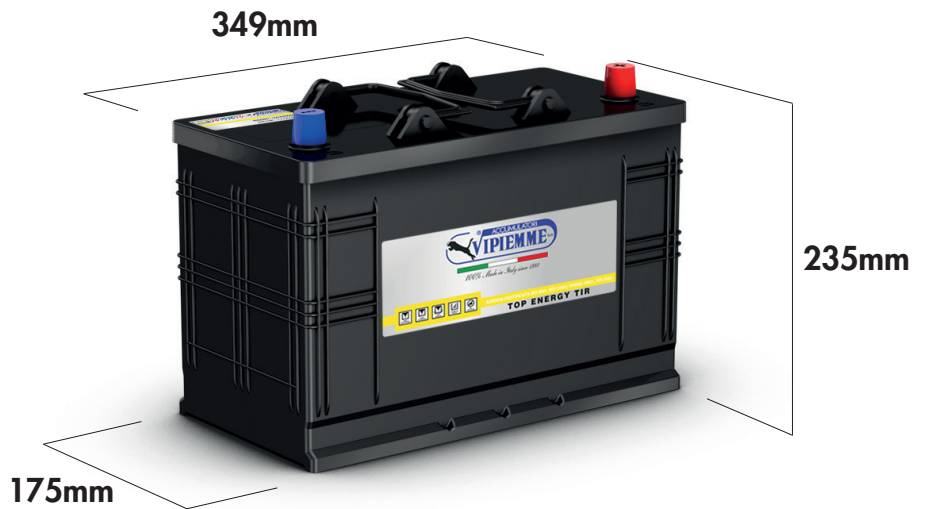


### TECHNICAL CHARACTERISTICS




**BOX AND LID**  
PP



**TEMPERATURE**  
According to EN50342-1



**SULPHURIC ACID**  
Density  
1.29 +/- 0,01 g/ml  
Approximate volume 6,0 l



**PLATES**  
Casted grids in Pb/Sb alloy with enveloped positive ones in PE. Expanded negative ones in Pb/Ca alloy



**BATTERY WEIGHT**  
27,5 ±5% Kg