


## FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B102C	V	Ah 20h	A (EN)	minutes		conical	X box 98COMP	Bottom Holds	positive	12x3
	12	110	850	200 at 25A	850	1 standard	98COMP	B0	Right	

# TOP ENERGY TIR

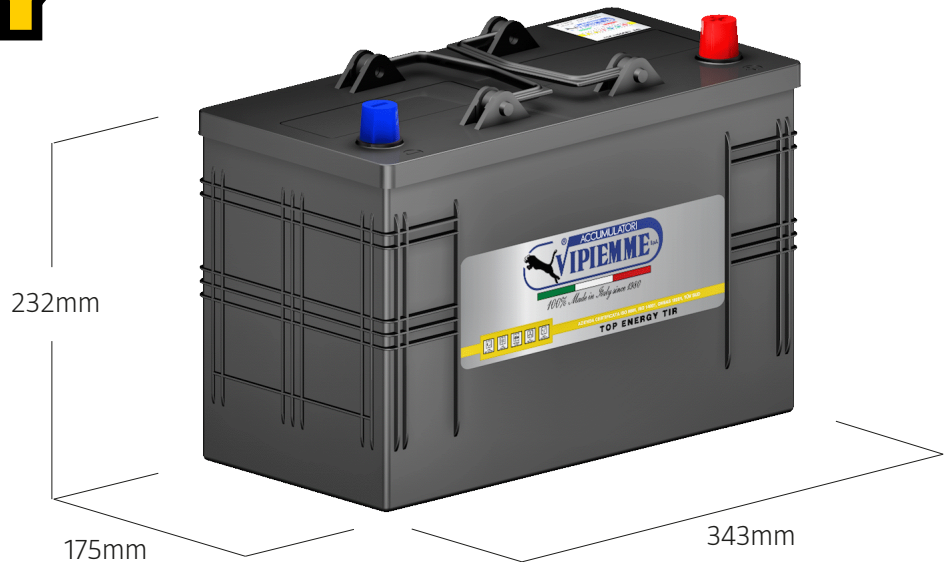


BOX AND LID COLOUR  
Black

### Technical Characteristics




BOX AND LID  
PP



TEMPERATURE  
All values are referred to 25°C



SULFURIC ACID  
Density  
1,28 +/- 0,01 g/ml  
Approximate volume 7,1l



PLATES  
Expanded grids Pb/Ca alloy.



WEIGHT  
29,0 ±5% Kg