


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom	Layout	Per pallet
B131C	V	Ah 20h	A (EN)	minutes		conical	X box 127COMP	Bottom Holds	positive	12x2
	12	130	920	250 at 25A	920	1 standard	127COMP	B0	Left	

TOP ENERGY TIR

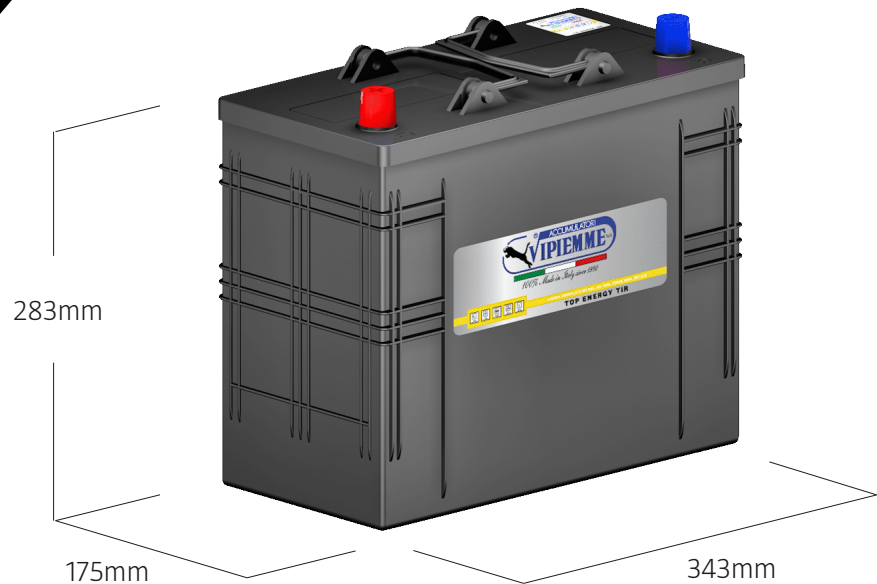


BOX AND LID COLOUR
Black


Technical Characteristics




BOX AND LID
PP



TEMPERATURE
All values are referred to 25°C



SULFORIC ACID
Density
1,28 +/- 0,01 g/ml
Approximate volume 8,9l



PLATES
Casted grids Pb/Sb alloy.



WEIGHT
32,5 ±5% Kg